

STEP LIGHTS SPECIFICATION SHEET



WL341

Asymmetric, straight to mains, cast finish step light

FEATURES

IP rating	IP67
Colour flexibility	Fixed colour
Walk Over / Drive Over	Walk over
Input	Mains AC
LED Lifetime	70,000h L70 B10
SDCM	3SDCM

INSTALLATION INFORMATION

Cut Out Size	Ø 80mm
Bathroom zone	2
Inrush Current	9A 0.8ms
Construction Material	Stainless steel (316)
Weight	1000g
Maximum ambient temperature	35°C
SELV	Yes
Electric Class (1, 2, 3)	1

PHOTOMETRICS @ 25°C

Product code	Wattage	Colour	Beam angle	lm	lm/W	lx @ 1m
WL341NW	2.6W	4000K	50°	59	22	65
WL341WW	2.6W	3000K	50°	50	19	54
WL34127	2.6W	2700K	50°	49	19	52

WIRING INFORMATION

Cable / Flying Lead	1m (H05RN-F) rubberised cable (outside diameter: 7mm)
Type of Wiring Required	Parallel

LED DRIVER

Product code	Input	SELV	Dimming	Bathroom zone	Min	Max
N/A (integrated SELV driver)	220-240V	N/A	No	2	N/A	N/A

ACCESSORIES

Installation tube included	
JB5	Gel filled waterproof connector
WC 5-9	Quick release waterproof joint



COLLINGWOOD
LIGHTING

01604 495 151
collingwoodlighting.com

- @collingwoodLED
- /collingwoodlighting
- collingwoodled

GUARANTEE / WARRANTY

7 year extended warranty

FEATURES & BENEFITS


Can be used as a wall light or ground light

Straight to mains for easy installation

Installation tube included

1m H05RN-F rubber cable attached for permanent use outdoors

Beam angles: 50° C0/C180 50°
C90/C270

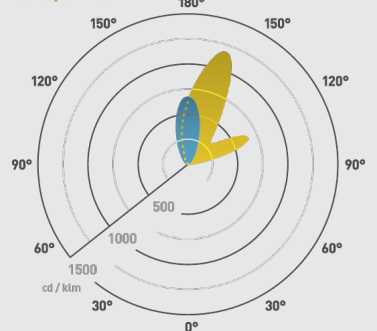

98x98mm

