


**PRODUCT Description**

**JUPITER 7W IP44/54 LED WALL LIGHT, 3000K, RJU0730-25 C/W  
PIR, DARK GREY, RJU0730DG-25, RJU0730-25**

**Features:**

- \* LED energy efficient wall light
  - \* Die cast aluminium housing with polycarbonate diffuser
  - \* 30000 hour average lamp life
  - \* RJU0730DG-2: PIR adjustable time range from 10 seconds to 5 minutes, detection of 120° and max 8m, lux level 10-20000lux
- Complies with EN 60598-1, EN 60598-2-1, EN 62493  
EN 61000-3-2, EN61000-3-3, EN61000-3-2, EN 55015

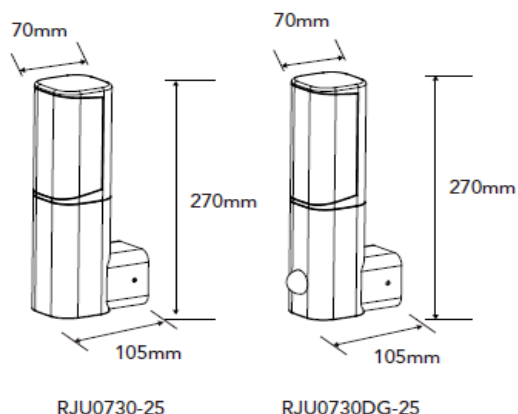

RJU0730-25

RJU0730DG-25

| Model        | Voltage   | Power | Lumen | Lm/ W | CCT   | CRI | Ta Range           | PF  | IP | IK |
|--------------|-----------|-------|-------|-------|-------|-----|--------------------|-----|----|----|
| RJU0730-25   | 220-240V  | 7W    | 280   | 40    | 3000K | 80  | -20°C < Ta < +50°C | 0.8 | 54 | -  |
| RJU0730DG-25 | 50/ 60 Hz |       |       |       |       |     |                    |     | 44 | -  |



RJU0730-25



RJU0730DG-25

| Model        | Weight  | Width | Height | Depth | Length | Diameter | Cut-out | B. Angle | Life         | Class   |
|--------------|---------|-------|--------|-------|--------|----------|---------|----------|--------------|---------|
| RJU0730-25   | 0.80 kg |       |        |       |        |          |         |          |              |         |
| RJU0730DG-25 | 0.84 kg | 70mm  | 270mm  | 105mm | -      | -        | -       | 120°     | 30,000 Hours | Class I |

PLEASE NOTE – INFORMATION CONTAINED IN THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE